


## Hubs

Hubs are essentially physical-layer repeaters:


- bits coming from one link go out all other links
- at the same rate
- no frame buffering
- no CSMA/CD at hub: adapters detect collisions
- provides net management functionality



5: DataLink Layer 5-1

## Interconnecting with hubs

- Backbone hub interconnects LAN segments
- Extends max distance between nodes
- But individual segment collision domains become one large collision domain
- Can't interconnect 10BaseT & 100BaseT

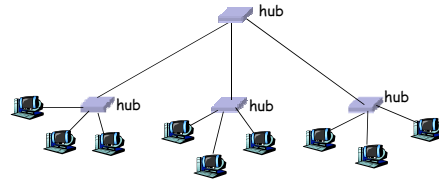


5: DataLink Layer 5-2

## Switch

- Link layer device
  - stores and forwards Ethernet frames
  - examines frame header and **selectively** forwards frame based on MAC dest address
  - when frame is to be forwarded on segment, uses CSMA/CD to access segment
- transparent
  - hosts are unaware of presence of switches
- plug-and-play, self-learning
  - switches do not need to be configured

5: DataLink Layer 5-3

## Forwarding

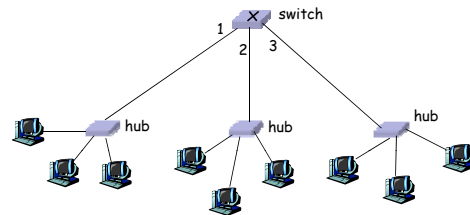

- How do determine onto which LAN segment to forward frame?
- Looks like a routing problem...

5: DataLink Layer 5-4

## Self learning

- A switch has a **switch table**
- entry in switch table:
  - (MAC Address, Interface, Time Stamp)
  - stale entries in table dropped (TTL can be 60 min)
- switch **learns** which hosts can be reached through which interfaces
  - when frame received, switch "learns" location of sender: incoming LAN segment
  - records sender/location pair in switch table

5: DataLink Layer 5-5

## Filtering/Forwarding

**When switch receives a frame:**


```
index switch table using MAC dest address
if entry found for destination
  then{
    if dest on segment from which frame arrived
      then drop the frame
    else forward the frame on interface indicated
  }
else flood
```

*forward on all but the interface on which the frame arrived*

5: DataLink Layer 5-6

## Switch example

Suppose C sends frame to D

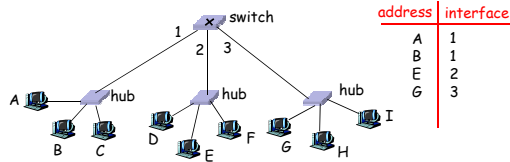


- Switch receives frame from C
  - notes in bridge table that C is on interface 1
  - because D is not in table, switch forwards frame into interfaces 2 and 3
- frame received by D

5: DataLink Layer 5-7

## Switch example

Suppose D replies back with frame to C.

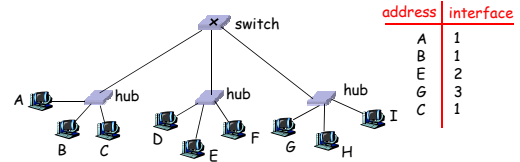


- Switch receives frame from D
  - notes in bridge table that D is on interface 2
  - because C is in table, switch forwards frame only to interface 1
- frame received by C

5: DataLink Layer 5-8

## Switch: traffic isolation


- switch installation breaks subnet into LAN segments
- switch **filters** packets:
  - same-LAN-segment frames not usually forwarded onto other LAN segments
  - segments become separate **collision domains**

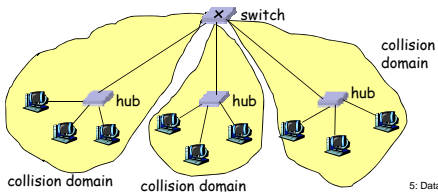

5: DataLink Layer 5-9

## Switches: dedicated access

- Switch with many interfaces
- Hosts have direct connection to switch
- No collisions; full duplex



Switching: A-to-A' and B-to-B' simultaneously, no collisions


5: DataLink Layer 5-10

## More on Switches

- **cut-through switching**: frame forwarded from input to output port without first collecting entire frame
  - slight reduction in latency
- combinations of shared/dedicated, 10/100/1000 Mbps interfaces

5: DataLink Layer 5-11


## Institutional network

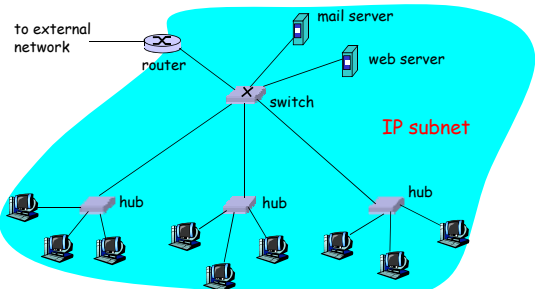

5: DataLink Layer 5-12

## Switches vs. Routers

- both store-and-forward devices
  - routers: network layer devices (examine network layer headers)
  - switches are link layer devices
- routers maintain routing tables, implement routing algorithms
- switches maintain switch tables, implement filtering, learning algorithms



5: DataLink Layer 5-13

## Summary comparison

	<u>hubs</u>	<u>routers</u>	<u>switches</u>
traffic isolation	no	yes	yes
plug & play	yes	no	yes
optimal routing	no	yes	no
cut through	yes	no	yes

5: DataLink Layer 5-14

## Link Layer

- 5.1 Introduction and services
- 5.2 Error detection and correction
- 5.3 Multiple access protocols
- 5.4 Link-Layer Addressing
- 5.5 Ethernet
- 5.6 Hubs and switches
- 5.7 PPP
- 5.8 Link Virtualization: ATM

5: DataLink Layer 5-15

## Point to Point Data Link Control

- one sender, one receiver, one link: easier than broadcast link:
  - no Media Access Control
  - no need for explicit MAC addressing
  - e.g., dialup link, ISDN line
- popular point-to-point DLC protocols:
  - PPP (point-to-point protocol)
  - HDLC: High level data link control (Data link used to be considered "high layer" in protocol stack!)

5: DataLink Layer 5-16

## PPP Design Requirements [RFC 1557]

- **packet framing**: encapsulation of network-layer datagram in data link frame
  - carry network layer data of any network layer protocol (not just IP) *at same time*
  - ability to demultiplex upwards
- **bit transparency**: must carry any bit pattern in the data field
- **error detection** (no correction)
- **connection liveness**: detect, signal link failure to network layer
- **network layer address negotiation**: endpoint can learn/configure each other's network address

5: DataLink Layer 5-17

## PPP non-requirements

- no error correction/recovery
- no flow control
- out of order delivery OK
- no need to support multipoint links (e.g., polling)

Error recovery, flow control, data re-ordering  
all relegated to higher layers!


5: DataLink Layer 5-18

## Byte Stuffing

- "data transparency" requirement: data field must be allowed to include flag pattern <01111110>
  - **Q:** is received <01111110> data or flag?
- **Sender:** adds ("stuffs") extra < 01111101> byte after each < 01111110> *data* byte
- **Receiver:**
  - two 01111101 bytes in a row: discard first byte, continue data reception
  - single 01111110: flag byte

5: DataLink Layer 5-19

## Byte Stuffing

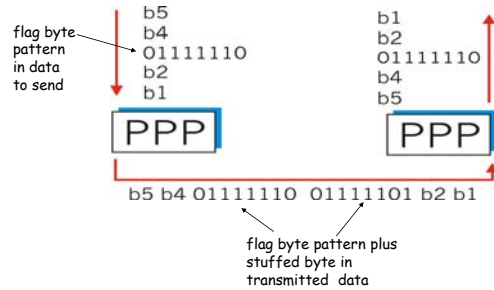

5: DataLink Layer 5-20

## Link Layer

- 5.1 Introduction and services
- 5.2 Error detection and correction
- 5.3 Multiple access protocols
- 5.4 Link-Layer Addressing
- 5.5 Ethernet
- 5.6 Hubs and switches
- 5.7 PPP
- **5.8 Link Virtualization: ATM and MPLS**

5: DataLink Layer 5-21

## Virtualization of networks

- Virtualization of resources: a powerful abstraction in systems engineering:
- computing examples: virtual memory, virtual devices
    - Virtual machines: e.g., java
    - IBM VM os from 1960's/70's
  - layering of abstractions: don't sweat the details of the lower layer, only deal with lower layers abstractly

5: DataLink Layer 5-22


## The Internet: virtualizing networks

1974: multiple unconnected nets

- ARPAnet
- data-over-cable networks
- packet satellite network (Aloha)
- packet radio network

... differing in:

- addressing conventions
- packet formats
- error recovery
- routing



ARPAnet



satellite net

\*A Protocol for Packet Network Intercommunication\*, V. Cerf, R. Kahn, IEEE Transactions on Communications, May, 1974, pp. 637-648.

5: DataLink Layer 5-23


## The Internet: virtualizing networks

Internetwork layer (IP):

- addressing: internetwork appears as a single, uniform entity, despite underlying local network heterogeneity
- network of networks

Gateway:

- "embed internetwork packets in local packet format or extract them"
- route (at internetwork level) to next gateway

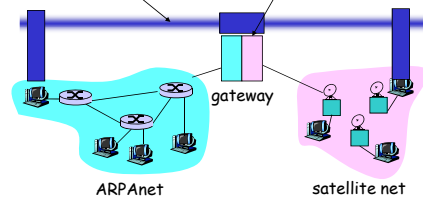

ARPAnet

satellite net

5: DataLink Layer 5-24

## Cerf & Kahn's Internetwork Architecture

What is virtualized?

- two layers of addressing: internetwork and local network
  - new layer (IP) makes everything homogeneous at internetwork layer
  - underlying local network technology
    - cable
    - satellite
    - 56K telephone modem
    - today: ATM, MPLS
- ... "invisible" at internetwork layer. Looks like a link layer technology to IP!


5: DataLink Layer 5-25

## Asynchronous Transfer Mode: ATM

- 1990's/00 standard for high-speed (155Mbps to 622 Mbps and higher) *Broadband Integrated Service Digital Network* architecture
- **Goal:** *integrated, end-end transport of carry voice, video, data*
  - meeting timing/QoS requirements of voice, video (versus Internet best-effort model)
  - "next generation" telephony: technical roots in telephone world
  - packet-switching (fixed length packets, called "cells") using virtual circuits

5: DataLink Layer 5-26

## ATM architecture

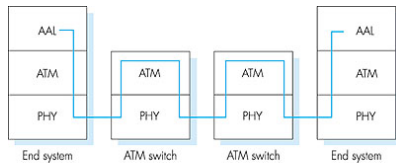

- **adaptation layer:** only at edge of ATM network
  - data segmentation/reassembly
  - roughly analogous to Internet transport layer
- **ATM layer:** "network" layer
  - cell switching, routing
- **physical layer**

5: DataLink Layer 5-27


## ATM: network or link layer?

**Vision:** end-to-end transport: "ATM from desktop to desktop"

- ATM *is* a network technology

**Reality:** used to connect IP backbone routers

- "IP over ATM"
- ATM as switched link layer, connecting IP routers



5: DataLink Layer 5-28

## ATM Adaptation Layer (AAL)

- **ATM Adaptation Layer (AAL):** "adapts" upper layers (IP or native ATM applications) to ATM layer below
- AAL present **only in end systems**, not in switches
- AAL layer segment (header/trailer fields, data) fragmented across multiple ATM cells
  - analogy: TCP segment in many IP packets



5: DataLink Layer 5-29

## ATM Layer

**Service:** transport cells across ATM network

- analogous to IP network layer
- very different services than IP network layer

Network Architecture	Service Model	Guarantees ?				Congestion feedback
		Bandwidth	Loss	Order	Timing	
Internet	best effort	none	no	no	no	no (inferred via loss)
ATM	CBR	constant rate	yes	yes	yes	no congestion
ATM	VBR	guaranteed rate	yes	yes	yes	no congestion
ATM	ABR	guaranteed minimum	no	yes	no	yes
ATM	UBR	none	no	yes	no	no

5: DataLink Layer 5-30

## ATM Layer: Virtual Circuits

- **VC transport:** cells carried on VC from source to dest
  - call setup, teardown for each call *before* data can flow
  - each packet carries VC identifier (not destination ID)
  - every switch on source-dest path maintain "state" for each passing connection
  - link, switch resources (bandwidth, buffers) may be *allocated* to VC: to get circuit-like perf.
- **Permanent VCs (PVCs)**
  - long lasting connections
  - typically: "permanent" route between to IP routers
- **Switched VCs (SVC):**
  - dynamically set up on per-call basis

5: DataLink Layer 5-31

## ATM VCs


- **Advantages of ATM VC approach:**
  - QoS performance guarantee for connection mapped to VC (bandwidth, delay, delay jitter)
- **Drawbacks of ATM VC approach:**
  - Inefficient support of datagram traffic
  - one PVC between each source/dest pair does not scale ( $N^2$  connections needed)
  - SVC introduces call setup latency, processing overhead for short lived connections

5: DataLink Layer 5-32

## IP-Over-ATM

### Classic IP only


- 3 "networks" (e.g., LAN segments)
- MAC (802.3) and IP addresses



Ethernet LANs


### IP over ATM

- replace "network" (e.g., LAN segment) with ATM network
- ATM addresses, IP addresses



5: DataLink Layer 5-33

## IP-Over-ATM

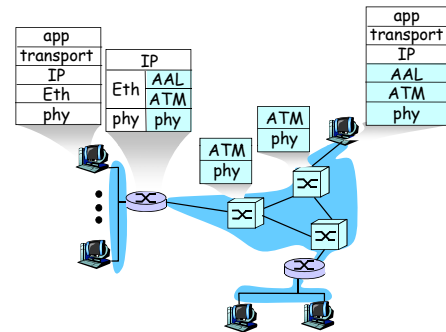

5: DataLink Layer 5-34

## Datagram Journey in IP-over-ATM Network


- **at Source Host:**
  - IP layer maps between IP, ATM dest address (using ARP)
  - passes datagram to AAL5
  - AAL5 encapsulates data, segments cells, passes to ATM layer
- **ATM network:** moves cell along VC to destination
- **at Destination Host:**
  - AAL5 reassembles cells into original datagram
  - if CRC OK, datagram is passed to IP

5: DataLink Layer 5-35

## IP-Over-ATM

### Issues:

- IP datagrams into ATM AAL5 PDUs
- from IP addresses to ATM addresses
  - just like IP addresses to 802.3 MAC addresses!



5: DataLink Layer 5-36

## Chapter 5: Summary

- principles behind data link layer services:
  - error detection, correction
  - sharing a broadcast channel: multiple access
  - link layer addressing
- instantiation and implementation of various link layer technologies
  - Ethernet
  - switched LANS
  - PPP
  - virtualized networks as a link layer: ATM

5: DataLink Layer 5-37

## Chapter 6: Wireless and Mobile Networks

### Background:

- # wireless (mobile) phone subscribers now exceeds # wired phone subscribers!
- computer nets: laptops, palmtops, PDAs, Internet-enabled phone promise anytime untethered Internet access
- two important (but different) challenges
  - communication over wireless link
  - handling mobile user who changes point of attachment to network

6: Wireless and Mobile Networks 6-38

## Chapter 6 outline

### 6.1 Introduction

#### Wireless

- 6.2 Wireless links, characteristics
  - CDMA
- 6.3 IEEE 802.11 wireless LANs ("wi-fi")
- 6.4 Cellular Internet Access
  - architecture
  - standards (e.g., GSM)


#### Mobility

- 6.5 Principles: addressing and routing to mobile users
- 6.6 Mobile IP
- 6.7 Handling mobility in cellular networks
- 6.8 Mobility and higher-layer protocols

#### 6.9 Summary


6: Wireless and Mobile Networks 6-39

## Elements of a wireless network

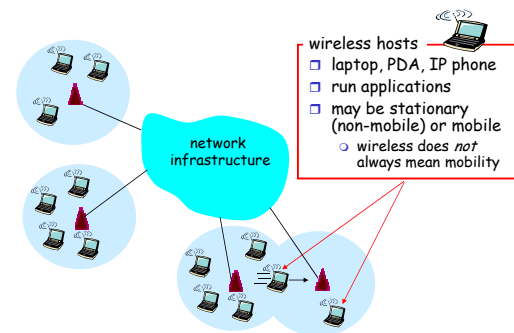


6: Wireless and Mobile Networks 6-40

## Elements of a wireless network

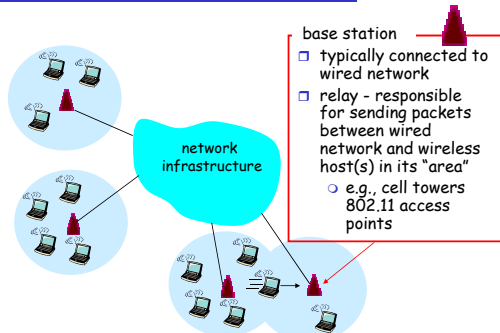

6: Wireless and Mobile Networks 6-41

## Elements of a wireless network

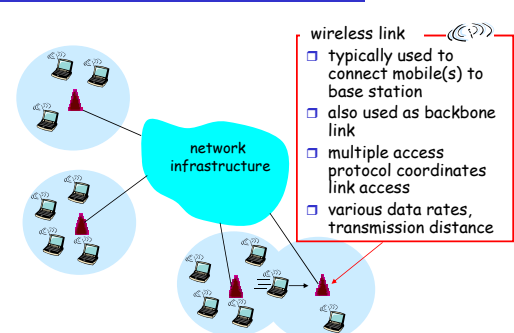

6: Wireless and Mobile Networks 6-42

## Characteristics of selected wireless link standards

