Last Course Review

What's the Internet

- communication *infrastructure* enables distributed applications:
  - Web, email, games, e-commerce, file sharing
- communication services provided to apps:
  - Connectionless unreliable
  - connection-oriented reliable



- What is a protocol?

protocols define format, order of msgs sent and received among network entities, and actions taken on msg transmission, receipt

What's a protocol?

a human protocol and a computer network protocol:

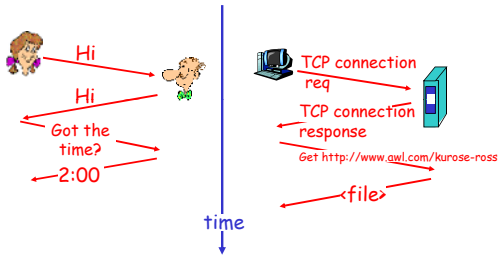

Q: Other human protocols?

Chapter 1: roadmap

1.1 What *is* the Internet?
1.2 Network edge
1.3 Network core
1.4 Network access and physical media
1.5 Internet structure and ISPs
1.6 Delay & loss in packet-switched networks
1.7 Protocol layers, service models
1.8 History

Network edge: connection-oriented service

Goal: data transfer between end systems

- *handshaking:* setup (prepare for) data transfer ahead of time
  - Hello, hello back human protocol
  - *set up "state"* in two communicating hosts
- TCP - Transmission Control Protocol
  - Internet's connection-oriented service

TCP service [RFC 793]

- *reliable, in-order* byte-stream data transfer
  - loss: acknowledgements and retransmissions
- *flow control:*
  - sender won't overwhelm receiver
- *congestion control:*
  - senders "slow down sending rate" when network congested

Network edge: connectionless service

Goal: data transfer between end systems

- same as before!
- UDP - User Datagram Protocol [RFC 768]:
  - connectionless
  - unreliable data transfer
  - no flow control
  - no congestion control

App's using TCP:

- HTTP (Web), FTP (file transfer), Telnet (remote login), SMTP (email)

App's using UDP:

- streaming media, teleconferencing, DNS, Internet telephony

The Network Core

- mesh of interconnected routers
- *the* fundamental question: how is data transferred through net?
  - circuit switching: dedicated circuit per call: telephone net
  - packet-switching: data sent thru net in discrete "chunks"



Network Core: Circuit Switching

End-end resources reserved for "call"

- link bandwidth, switch capacity
- dedicated resources: no sharing
- circuit-like (guaranteed) performance
- call setup required



Network Core: Circuit Switching

network resources (e.g., bandwidth) divided into "pieces"

- pieces allocated to calls
- resource piece *idle* if not used by owning call *(no sharing)*

- dividing link bandwidth into "pieces"
  - frequency division
  - time division

Circuit Switching: FDM and TDM

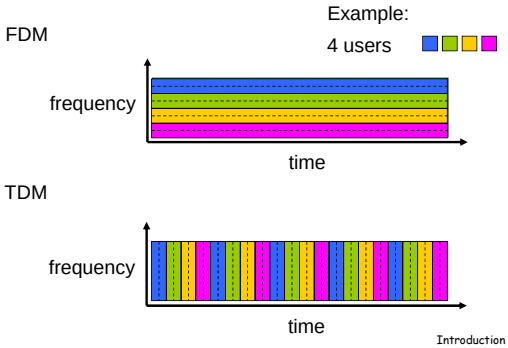

Network Core: Packet Switching

each end-end data stream divided into *packets*

- user A, B packets *share* network resources
- each packet uses full link bandwidth
- resources used *as needed*

resource contention:

- aggregate resource demand can exceed amount available
- congestion: packets queue, wait for link use
- store and forward: packets move one hop at a time
  - Node receives complete packet before forwarding

Packet switching versus circuit switching

Packet switching allows more users to use network!

- 1 Mb/s link
- each user:
  - 100 kb/s when "active"
  - active 10% of time
- circuit-switching:
  - 10 users
- packet switching:
  - with 35 users, probability > 10 active less than .0004



Packet switching versus circuit switching

Is packet switching a "slam dunk winner?"

- Great for bursty data
  - resource sharing
  - simpler, no call setup
- Excessive congestion: packet delay and loss
  - protocols needed for reliable data transfer, congestion control
- Q: How to provide circuit-like behavior?
  - bandwidth guarantees needed for audio/video apps
  - still an unsolved problem (chapter 6)

Packet-switching: store-and-forward

- Takes L/R seconds to transmit (push out) packet of L bits on to link or R bps
- Entire packet must arrive at router before it can be transmitted on next link: *store and forward*
- delay = 3L/R

Example:

- L = 7.5 Mbits
- R = 1.5 Mbps
- delay = 15 sec

Packet-switched networks: forwarding

- *Goal:* move packets through routers from source to destination
  - we'll study several path selection (i.e. routing) algorithms (chapter 4)
- datagram network:
  - *destination address* in packet determines next hop
  - routes may change during session
  - analogy: driving, asking directions
- virtual circuit network:
  - each packet carries tag (virtual circuit ID), tag determines next hop
  - fixed path determined at *call setup time*, remains fixed thru call
  - *routers maintain per-call state*

Network Taxonomy

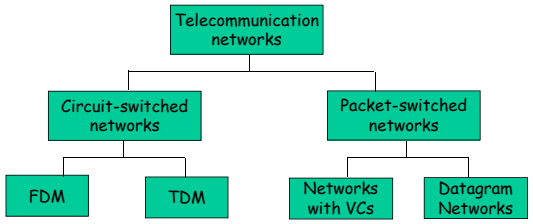

• Datagram network is *not* either connection-oriented or connectionless.
• Internet provides both connection-oriented (TCP) and connectionless services (UDP) to apps.

Chapter 1: roadmap

1.1 What *is* the Internet?
1.2 Network edge
1.3 Network core
1.4 Network access and physical media
1.5 Internet structure and ISPs
1.6 Delay & loss in packet-switched networks
1.7 Protocol layers, service models
1.8 History

Access networks and physical media

Q: How to connect end systems to edge router?

- residential access nets
- institutional access networks (school, company)
- mobile access networks

Keep in mind:

- bandwidth (bits per second) of access network?
- shared or dedicated?



Residential access: point to point access

- Dialup via modem
  - up to 56Kbps direct access to router (often less)
  - Can't surf and phone at same time: can't be "always on"



- ADSL: asymmetric digital subscriber line
  - up to 1 Mbps upstream (today typically < 256 kbps)
  - up to 8 Mbps downstream (today typically < 1 Mbps)
  - FDM: 50 kHz - 1 MHz for downstream
    4 kHz - 50 kHz for upstream
    0 kHz - 4 kHz for ordinary telephone

Residential access: cable modems

- HFC: hybrid fiber coax
  - asymmetric: up to 30Mbps downstream, 2 Mbps upstream
- network of cable and fiber attaches homes to ISP router
  - homes share access to router
- deployment: available via cable TV companies

Residential access: cable modems

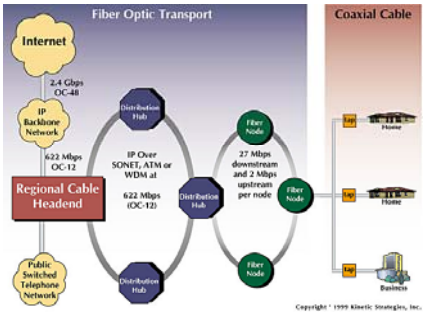

Diagram: http://www.cabledatacomnews.com/cmic/diagram.html

Cable Network Architecture: Overview

Typically 500 to 5,000 homes

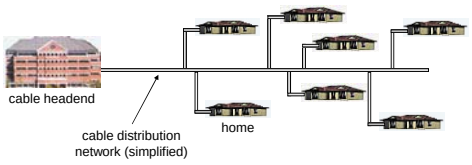

Cable Network Architecture: Overview

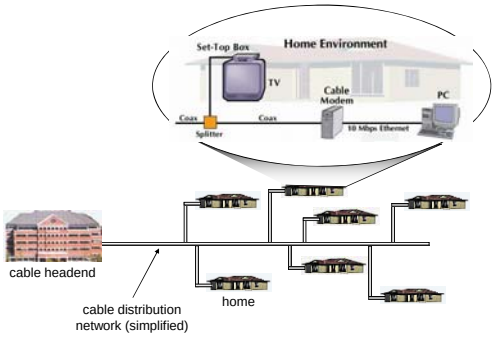

Cable Network Architecture: Overview

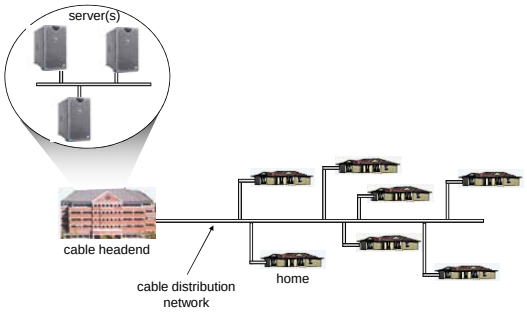

Cable Network Architecture: Overview

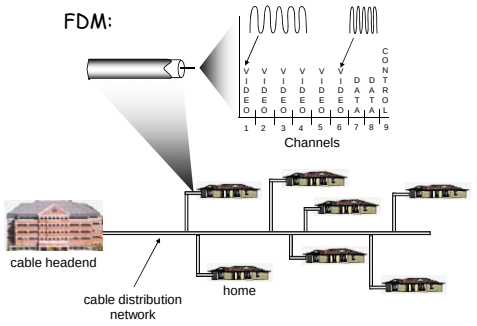

Company access: local area networks

- company/univ local area network (LAN) connects end system to edge router
- Ethernet:
  - shared or dedicated link connects end system and router
  - 10 Mbs, 100Mbps, Gigabit Ethernet
- LANs: chapter 5



Wireless access networks

- shared *wireless* access network connects end system to router
  - via base station aka "access point"
- wireless LANs:
  - 802.11b (WiFi): 11 Mbps
- wider-area wireless access
  - provided by telco operator
  - 3G ~ 384 kbps
    - Will it happen??
  - WAP/GPRS in Europe



Home networks

Typical home network components:

- ADSL or cable modem
- router/firewall/NAT
- Ethernet
- wireless access point

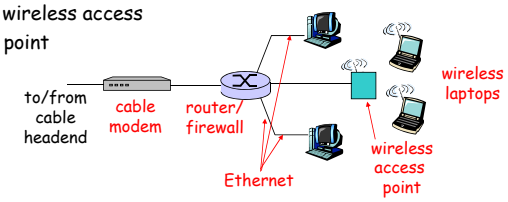

Physical Media

- Bit: propagates between transmitter/rcvr pairs
- physical link: what lies between transmitter & receiver
- guided media:
  - signals propagate in solid media: copper, fiber, coax
- unguided media:
  - signals propagate freely, e.g., radio

Twisted Pair (TP)

- two insulated copper wires
  - Category 3: traditional phone wires, 10 Mbps Ethernet
  - Category 5: 100Mbps Ethernet

Physical Media: coax, fiber

Coaxial cable:

- two concentric copper conductors
- bidirectional
- baseband:
  - single channel on cable
  - legacy Ethernet
- broadband:
  - multiple channel on cable
  - HFC

Fiber optic cable:

- glass fiber carrying light pulses, each pulse a bit
- high-speed operation:
  - high-speed point-to-point transmission (e.g., 5 Gps)
- low error rate: repeaters spaced far apart ; immune to electromagnetic noise

Physical media: radio

- signal carried in electromagnetic spectrum
- no physical "wire"
- bidirectional
- propagation environment effects:
  - reflection
  - obstruction by objects
  - interference

Radio link types:

- terrestrial microwave
  - e.g. up to 45 Mbps channels
- LAN (e.g., Wifi)
  - 2Mbps, 11Mbps
- wide-area (e.g., cellular)
  - e.g. 3G: hundreds of kbps
- satellite
  - up to 50Mbps channel (or multiple smaller channels)
  - 270 msec end-end delay
  - geosynchronous versus low altitude

Chapter 1: roadmap

1.1 What *is* the Internet?
1.2 Network edge
1.3 Network core
1.4 Network access and physical media
1.5 Internet structure and ISPs
1.6 Delay & loss in packet-switched networks
1.7 Protocol layers, service models
1.8 History

Internet structure: network of networks

- roughly hierarchical
- at center: "tier-1" ISPs (e.g., UUNet, BBN/Genuity, Sprint, AT&T), national/international coverage
  - treat each other as equals

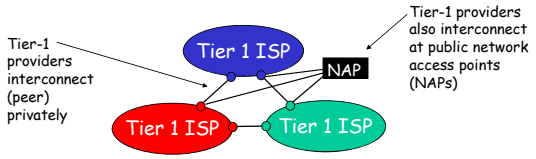

Tier-1 ISP: e.g., Sprint

Sprint US backbone network

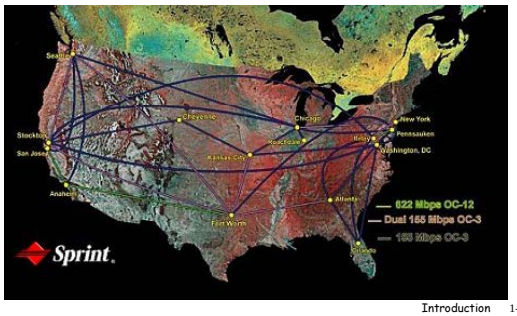

Internet structure: network of networks

- "Tier-2" ISPs: smaller (often regional) ISPs
  - Connect to one or more tier-1 ISPs, possibly other tier-2 ISPs

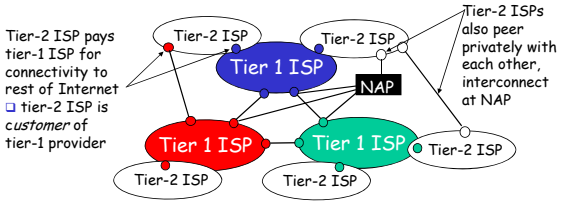

Internet structure: network of networks

- "Tier-3" ISPs and local ISPs
  - last hop ("access") network (closest to end systems)

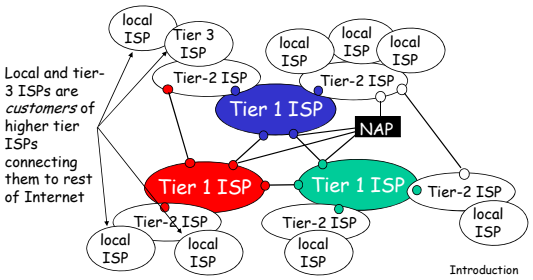

Internet structure: network of networks

- a packet passes through many networks!

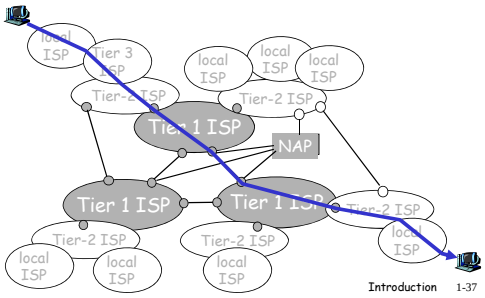

Chapter 1: roadmap

1.1 What *is* the Internet?
1.2 Network edge
1.3 Network core
1.4 Network access and physical media
1.5 Internet structure and ISPs
1.6 Delay & loss in packet-switched networks
1.7 Protocol layers, service models
1.8 History

How do loss and delay occur?

packets *queue* in router buffers

- packet arrival rate to link exceeds output link capacity
- packets queue, wait for turn