

Last Course Review

Principles of Congestion Control

Congestion:

- informally: "too many sources sending too much data too fast for *network* to handle"
- different from flow control!
- manifestations:
 - lost packets (buffer overflow at routers)
 - long delays (queueing in router buffers)
- a top-10 problem!

Introduction 1-1

Approaches towards congestion control

Two broad approaches towards congestion control:

End-end congestion control:

- no explicit feedback from network
- congestion inferred from end-system observed loss, delay
- approach taken by TCP

Network-assisted congestion control:

- routers provide feedback to end systems
 - single bit indicating congestion (SNA, DECbit, TCP/IP ECN, ATM)
 - explicit rate sender should send at

Introduction 1-2

TCP Congestion Control

- end-end control (no network assistance)
- sender limits transmission:

$$\text{LastByteSent} - \text{LastByteAcked} \leq \text{CongWin}$$
- Roughly,

$$\text{rate} = \frac{\text{CongWin}}{\text{RTT}} \text{ Bytes/sec}$$
- CongWin is dynamic, function of perceived network congestion

How does sender perceive congestion?

- loss event = timeout or 3 duplicate acks
- TCP sender reduces rate (CongWin) after loss event

three mechanisms:


- AIMD
- slow start
- conservative after timeout events

Introduction 1-3

TCP AIMD

multiplicative decrease:
cut CongWin in half after loss event

additive increase:
increase CongWin by 1 MSS every RTT in the absence of loss events: *probing*

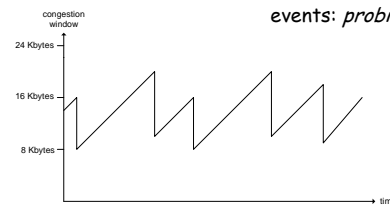


Long-lived TCP connection

Introduction 1-4

TCP Slow Start (more)


- When connection begins, increase rate exponentially until first loss event:
 - double CongWin every RTT
 - done by incrementing CongWin for every ACK received
- **Summary:** initial rate is slow but ramps up exponentially fast



Introduction 1-5

TCP Fairness

Fairness goal: if K TCP sessions share same bottleneck link of bandwidth R, each should have average rate of R/K



Introduction 1-6

Fairness (more)

Fairness and UDP

- ❑ Multimedia apps often do not use TCP
 - do not want rate throttled by congestion control
- ❑ Instead use UDP:
 - pump audio/video at constant rate, tolerate packet loss
- ❑ Research area: TCP friendly

Fairness and parallel TCP connections

- ❑ nothing prevents app from opening parallel connections between 2 hosts.
- ❑ Web browsers do this
- ❑ Example: link of rate R supporting 9 connections:
 - new app asks for 1 TCP, gets rate $R/10$
 - new app asks for 11 TCPs, gets $R/2!$

Introduction 1-7

Chapter 4: Network Layer

Chapter goals:

- ❑ understand principles behind network layer services:
 - routing (path selection)
 - dealing with scale
 - how a router works
 - advanced topics: IPv6, mobility
- ❑ instantiation and implementation in the Internet

Introduction 1-8


Chapter 4: Network Layer

- ❑ 4.1 Introduction
- ❑ 4.2 Virtual circuit and datagram networks
- ❑ 4.3 What's inside a router
- ❑ 4.4 IP: Internet Protocol
 - Datagram format
 - IPv4 addressing
 - ICMP
 - IPv6
- ❑ 4.5 Routing algorithms
 - Link state
 - Distance Vector
 - Hierarchical routing
- ❑ 4.6 Routing in the Internet
 - RIP
 - OSPF
 - BGP
- ❑ 4.7 Broadcast and multicast routing

Introduction 1-9

Network layer

- ❑ transport segment from sending to receiving host
- ❑ on sending side encapsulates segments into datagrams
- ❑ on receiving side, delivers segments to transport layer
- ❑ network layer protocols in *every* host, router
- ❑ Router examines header fields in all IP datagrams passing through it




Introduction 1-10

Key Network-Layer Functions

- ❑ **forwarding:** move packets from router's input to appropriate router output
- ❑ **routing:** determine route taken by packets from source to dest.
 - Routing algorithms
- analogy:**
- ❑ **routing:** process of planning trip from source to dest
- ❑ **forwarding:** process of getting through single interchange

Introduction 1-11

Interplay between routing and forwarding

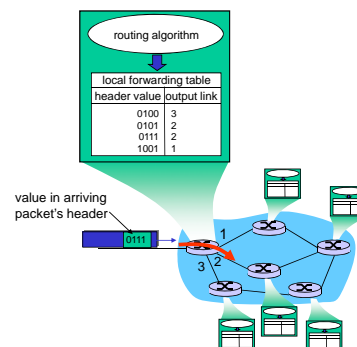

Introduction 1-12

Connection setup

- ❑ 3rd important function in *some* network architectures:
 - ATM, frame relay, X.25
- ❑ Before datagrams flow, two hosts and intervening routers establish virtual connection
 - Routers get involved
- ❑ Network and transport layer connection service:
 - **Network:** between two hosts
 - **Transport:** between two processes

Introduction 1-13

Network service model

Q: What *service model* for "channel" transporting datagrams from sender to receiver?

Example services for individual datagrams:

- ❑ guaranteed delivery
- ❑ Guaranteed delivery with less than 40 msec delay

Example services for a flow of datagrams:

- ❑ In-order datagram delivery
- ❑ Guaranteed minimum bandwidth to flow
- ❑ Restrictions on changes in inter-packet spacing

Introduction 1-14

Network layer service models:

Network Architecture	Service Model	Guarantees ?				Congestion feedback
		Bandwidth	Loss	Order	Timing	
Internet	best effort	none	no	no	no	no (inferred via loss)
ATM	CBR	constant rate	yes	yes	yes	no congestion
ATM	VBR	guaranteed rate	yes	yes	yes	no congestion
ATM	ABR	guaranteed minimum	no	yes	no	yes
ATM	UBR	none	no	yes	no	no

Introduction 1-15

Chapter 4: Network Layer

- ❑ 4.1 Introduction
- ❑ 4.2 Virtual circuit and datagram networks
- ❑ 4.3 What's inside a router
- ❑ 4.4 IP: Internet Protocol
 - Datagram format
 - IPv4 addressing
 - ICMP
 - IPv6
- ❑ 4.5 Routing algorithms
 - Link state
 - Distance Vector
 - Hierarchical routing
- ❑ 4.6 Routing in the Internet
 - RIP
 - OSPF
 - BGP
- ❑ 4.7 Broadcast and multicast routing

Introduction 1-16

Network layer connection and connection-less service

- ❑ Datagram network provides network-layer connectionless service
- ❑ VC network provides network-layer connection service
- ❑ Analogous to the transport-layer services, but:
 - **Service:** host-to-host
 - **No choice:** network provides one or the other
 - **Implementation:** in the core

Introduction 1-17

Virtual circuits

"source-to-dest path behaves much like telephone circuit"

- performance-wise
 - network actions along source-to-dest path
- ❑ call setup, teardown for each call *before* data can flow
 - ❑ each packet carries VC identifier (not destination host address)
 - ❑ every router on source-dest path maintains "state" for each passing connection
 - ❑ link, router resources (bandwidth, buffers) may be *allocated* to VC

Introduction 1-18


VC implementation

A VC consists of:

1. Path from source to destination
 2. VC numbers, one number for each link along path
 3. Entries in forwarding tables in routers along path
- ❑ Packet belonging to VC carries a VC number.
 - ❑ VC number must be changed on each link.
 - New VC number comes from forwarding table

Introduction 1-19

Forwarding table



Forwarding table in northwest router:


Incoming interface	Incoming VC #	Outgoing interface	Outgoing VC #
1	12	3	22
2	63	1	18
3	7	2	17
1	97	3	87
...

Routers maintain connection state information!

Introduction 1-20

Virtual circuits: signaling protocols


- ❑ used to setup, maintain teardown VC
- ❑ used in ATM, frame-relay, X.25
- ❑ not used in today's Internet

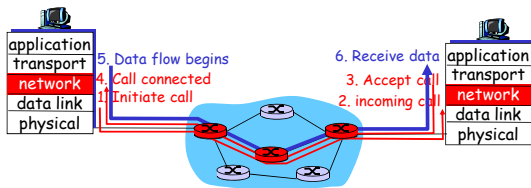

Introduction 1-21

Datagram networks

- ❑ no call setup at network layer
- ❑ routers: no state about end-to-end connections
 - no network-level concept of "connection"
- ❑ packets forwarded using destination host address
 - packets between same source-dest pair may take different paths

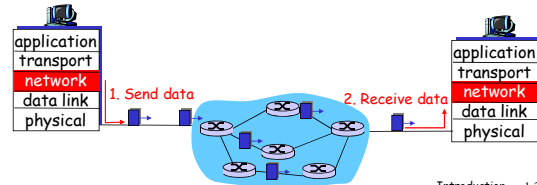

Introduction 1-22

Forwarding table

4 billion possible entries

Destination Address Range	Link Interface
11001000 00010111 00010000 00000000 through 11001000 00010111 00010111 11111111	0
11001000 00010111 00011000 00000000 through 11001000 00010111 00011000 11111111	1
11001000 00010111 00011001 00000000 through 11001000 00010111 00011111 11111111	2
otherwise	3

Introduction 1-23

Longest prefix matching

Prefix Match	Link Interface
11001000 00010111 00010	0
11001000 00010111 00011000	1
11001000 00010111 00011	2
otherwise	3

Examples

DA: 11001000 00010111 00010110 10100001 Which interface?

DA: 11001000 00010111 00011000 10101010 Which interface?

Introduction 1-24

Datagram or VC network: why?

Internet

- data exchange among computers
 - "elastic" service, no strict timing requirement.
- "smart" end systems (computers)
 - can adapt, perform control, error recovery
 - simple inside network, complexity at "edge"
- many link types
 - different characteristics
 - uniform service difficult

ATM

- evolved from telephony
- human conversation:
 - strict timing, reliability requirements
 - need for guaranteed service
- "dumb" end systems
 - telephones
 - complexity inside network

Introduction 1-25

Chapter 4: Network Layer


- 4.1 Introduction
- 4.2 Virtual circuit and datagram networks
- 4.3 What's inside a router
- 4.4 IP: Internet Protocol
 - Datagram format
 - IPv4 addressing
 - ICMP
 - IPv6
- 4.5 Routing algorithms
 - Link state
 - Distance Vector
 - Hierarchical routing
- 4.6 Routing in the Internet
 - RIP
 - OSPF
 - BGP
- 4.7 Broadcast and multicast routing

Introduction 1-26

Router Architecture Overview


Two key router functions:

- run routing algorithms/protocol (RIP, OSPF, BGP)
- forwarding datagrams from incoming to outgoing link

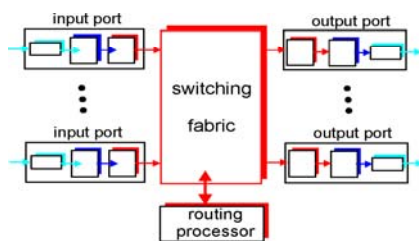

Introduction 1-27

Input Port Functions

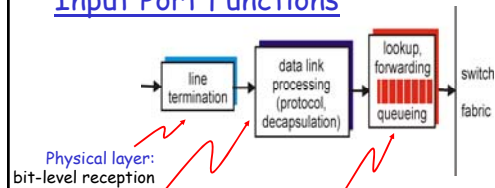

Physical layer:
bit-level reception


Data link layer:
e.g., Ethernet
see chapter 5

Decentralized switching:

- given datagram dest., lookup output port using forwarding table in input port memory
- goal: complete input port processing at 'line speed'
- queuing: if datagrams arrive faster than forwarding rate into switch fabric

Introduction 1-28

Three types of switching fabrics

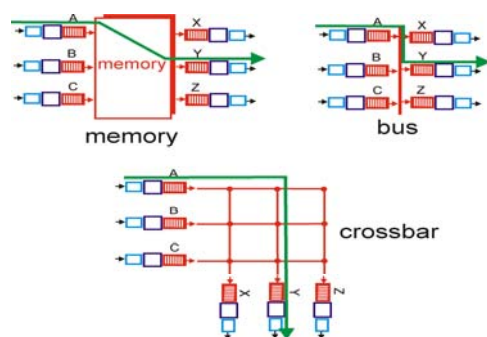


Introduction 1-29

Switching Via Memory


First generation routers:

- traditional computers with switching under direct control of CPU
- packet copied to system's memory
- speed limited by memory bandwidth (2 bus crossings per datagram)

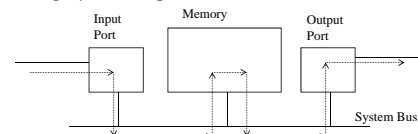

Introduction 1-30

Switching Via a Bus



- datagram from input port memory to output port memory via a shared bus
- bus contention:** switching speed limited by bus bandwidth
- 1 Gbps bus, Cisco 1900: sufficient speed for access and enterprise routers (not regional or backbone)


Introduction 1-31

Switching Via An Interconnection Network

- overcome bus bandwidth limitations
- Banyan networks, other interconnection nets initially developed to connect processors in multiprocessor
- Advanced design: fragmenting datagram into fixed length cells, switch cells through the fabric.
- Cisco 12000: switches Gbps through the interconnection network

Introduction 1-32


Output Ports

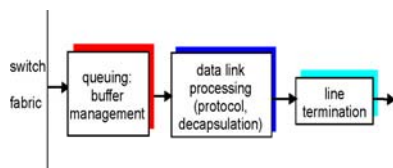

- Buffering** required when datagrams arrive from fabric faster than the transmission rate
- Scheduling discipline** chooses among queued datagrams for transmission

Introduction 1-33

Output port queuing

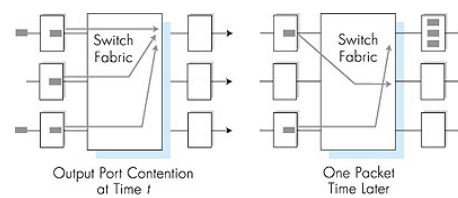


- buffering when arrival rate via switch exceeds output line speed
- queuing (delay) and loss due to output port buffer overflow!**

Introduction 1-34

Input Port Queuing

- Fabric slower than input ports combined -> queuing may occur at input queues
- Head-of-the-Line (HOL) blocking:** queued datagram at front of queue prevents others in queue from moving forward
- queuing delay and loss due to input buffer overflow!**

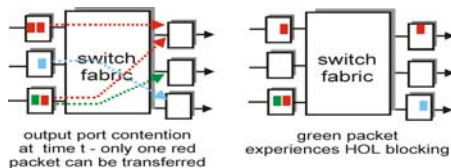

Introduction 1-35


Chapter 4: Network Layer

- 4.1 Introduction
- 4.2 Virtual circuit and datagram networks
- 4.3 What's inside a router
- 4.4 IP: Internet Protocol
 - Datagram format
 - IPv4 addressing
 - ICMP
 - IPv6
- 4.5 Routing algorithms
 - Link state
 - Distance Vector
 - Hierarchical routing
- 4.6 Routing in the Internet
 - RIP
 - OSPF
 - BGP
- 4.7 Broadcast and multicast routing

Introduction 1-36

The Internet Network layer

Host, router network layer functions:

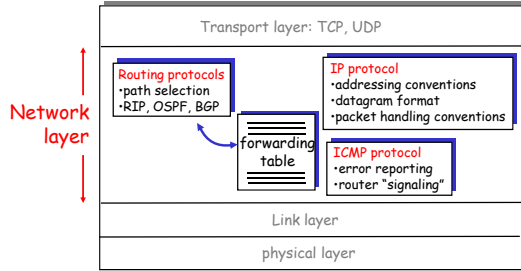

Introduction 1-37

Chapter 4: Network Layer

- 4.1 Introduction
- 4.2 Virtual circuit and datagram networks
- 4.3 What's inside a router
- 4.4 IP: Internet Protocol
 - Datagram format
 - IPv4 addressing
 - ICMP
 - IPv6
- 4.5 Routing algorithms
 - Link state
 - Distance Vector
 - Hierarchical routing
- 4.6 Routing in the Internet
 - RIP
 - OSPF
 - BGP
- 4.7 Broadcast and multicast routing

Introduction 1-38